

FORK DECK MAINTENANCE PLATFORM

Turn your fork truck into a personnel lift; Safe, economical access to heights greater than those easily reached by a rolling ladder.

- Rugged steel construction
- Non-skid platform
- 42" high rails with midrails, 4" toeboards and locking gate
- 60" high screen shields operator from fork lift mast
- Safety chain secures platform to mast
- 2" x 7" fork pockets mounted on 29" centers
- 4" swivel casters on base permit easy positioning
- Safety orange powder coat finish
- Ships flat in a box for easy assembly
- Built to ANSI B56.10 standards

Model	L" X W"	Weight
FD-O-C	36" x 36"	135
FD-48-C	36" x 48"	157
FD-40-48	48" x 40"	164

OPTIONAL ACCESSORIES	
Fluorescent Bulb Caddy	26
Tool Tray	14
All welded available	-



1000 lbs capacity

CANTILEVER SERIES

Features:

- 300 lbs. capacity (higher capacities available - contact factory)
- 59 degree slope
- Heavy-duty 1" x 2" rectangular tube frame
- High quality 5" x 2" locking casters
- Available with Rear Guardrail removed for easy walk through
- Powder coat finish
- Ships KD to prevent freight damage and lower freight cost

ADD PLATFORM OVERHANG LENGTH TO MODEL NUMBER WHEN ORDERING



CANTILEVER LADDERS

PLATFORM OVERHANG					14" OVERHANG		28" OVERHANG		35" OVERHANG		42" OVERHANG	
STEPS	PLATFORM HEIGHT	VERTICAL CLEARANCE	PLATFORM WIDTH	MODEL #	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"	WEIGHT	BASE W" x D"
6 STEP	60"	57"	24"	CL-6	468	32 x 46	735	32 x 53	763	32 x 60	791	32 x 67
7 STEP	70"	67"	24"	CL-7	442	32 x 52	695	32 x 52	773	32 x 59	801	32 x 66
8 STEP	80"	77"	24"	CL-8	412	32 x 58	640	32 x 58	779	32 x 58	807	32 x 65
9 STEP	90"	87"	24"	CL-9	405	32 x 65	583	32 x 65	697	32 x 65	811	32 x 65
10 STEP	100"	97"	24"	CL-10	401	32 x 71	554	32 x 71	668	32 x 71	757	32 x 71
11 STEP	110"	107"	24"	CL-11	405	32 x 77	544	32 x 77	633	32 x 77	722	32 x 77
12 STEP	120"	117"	24"	CL-12	409	32 x 84	537	32 x 84	601	32 x 84	690	32 x 84
13 STEP	130"	127"	24"	CL-13	417	40 x 90	520	40 x 90	609	40 x 90	673	40 x 90
14 STEP	140"	137"	24"	CL-14	450	40 x 96	528	40 x 96	592	40 x 96	656	40 x 96
15 STEP	150"	147"	24"	CL-15	458	40 x 103	536	40 x 103	600	40 x 103	664	40 x 103

Weight is a combination of the ladder and counter weight, does not include skidding, add 120 lbs for packaging.

NEW! TRUCK/DOCK ACCESS LADDER



- Great for accessing trucks or docks
- Rugged - base frame and rear vertical are 2" x 1" rectangular tubing
- 21" Deep Top Step standard
- Heavy duty serrated grating step tread
- 10" rear rubber wheels - Great on parking lots or rough surfaces
- Lightweight - lift and roll wheelbarrow portability
- 450 lbs. capacity
- Available in both 59° ladder slope or gradual 50° stairway slope
- No Rear Guardrail standard for easy walk through (includes snap chain)
- Gray powder coat finish
- Built to OSHA and ANSI standards

LADDER SLOPE 59°

MODEL #	TOP STEP HEIGHT	OVERALL HEIGHT	STEP WIDTH	BASE W" x L"	WEIGHT LBS.
TA-5-24	50"	80"	24"	32" x 53"	145
TA-5-36	50"	80"	36"	44" x 53"	170

STAIRWAY LADDER SLOPE 50 DEGREE

MODEL #	TOP STEP HEIGHT	OVERALL HEIGHT	STEP WIDTH	BASE W" x L"	WEIGHT LBS.
SW-TA-5-24	50"	80"	24"	32" x 60"	155
SW-TA-5-36	50"	80"	36"	44" x 60"	180



TANK TOP LIFT

FEATURES:

- Provides easy access to tank trucks, railroad cars or other cantilevered applications
- Great for clearing snow and ice off tops of trailers
- Manually propelled for use on hard level surfaces
- 48" long cantilevered platform
- Hydraulic hand pump raises and lowers platform
- Step and deck tread is open serrated grating, while slip resistant rungs provide access when platform is raised
- Base is 28" wide and 60" long, fixed outriggers spread 69"
- Full rails on both sides with gates at each end of platform
- Recommended Option: 30" extension railing
- Two swivel and two rigid 8" casters for use on hard surfaces
- Two adjustable stabilizing jacks secure lifts to ground
- Available with a fixed platform height
- 300 lbs. load capacity
- Standard finish deep gray enamel paint
- Safety orange powder coat also available - Recommended for outdoor applications


OPTIONAL ACCESSORIES

- AC electric power
- DC electric power
- Air-Hydraulic power
- Tool Tray
- Fluorescent tube holder
- Platform duplex receptacle
- Removable 30" extension railing
- Safety orange powder coat finish

Three available power options:

- Convenient plug in 120V AC with thermal overload protection
- Independent 12V DC deep cycle system complete with battery and charger along with a double solenoid for additional safety
- Air hydraulic power requiring 90 CFM with 90 PSI pressure

Caution: Unless special provisions are made, platforms and lifts must not be used for energized barewire electrical work or operated on inclined surfaces. When this equipment is used, ground personnel should be excluded from the immediate work area. Compliance with unspecified codes should not be assumed.

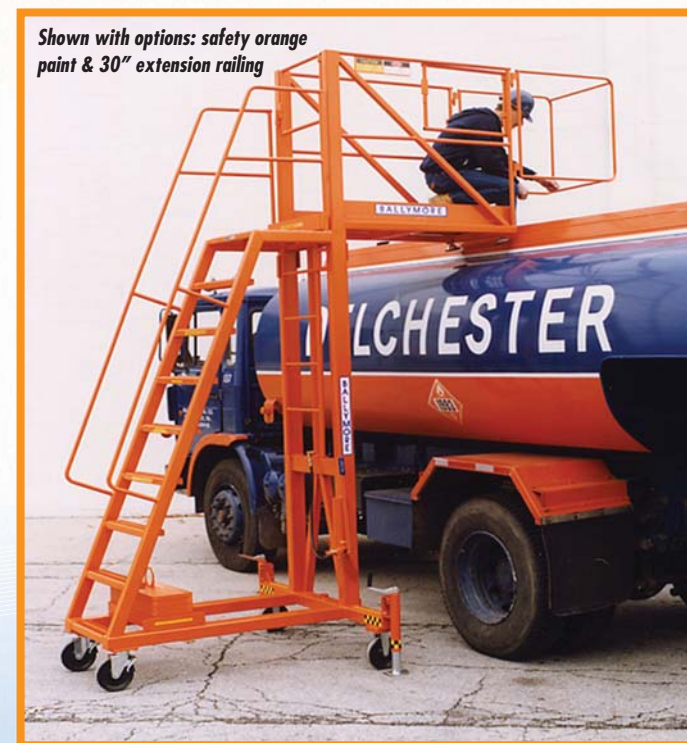

Shown with options: safety orange paint & 30" extension railing

Model Number	Platform Max	Height Min	Platform Length	Platform Width	Underclearance Height	Weight Lbs.
TT-913	13' 8"	9' 4"	48"	24"	Adjustable 9' to 13'	1525
TT-913F	13' 8"	9' 4"	48"	24"	Non-Adjustable 9' to 13'	1450

SCISSOR LIFTS

FEATURES:

- Manually propelled - Rated Capacity 1000 lbs./four person
- Totally enclosed platform with 42" guardrails, midrails, 4" toeboards and swing-in gate
- Large 3' x 8' platform with serrated grating deck to assure secure footing
- Built-in ladder provides access to platform in fully lowered position
- 8" swivel casters for easy rolling and maneuverability
- Self-storing outriggers extend from base to provide maximum stability (optional on lower height models)
- Leveling jacks secure unit to floor and compensate for uneven surfaces (standard on floor models with raised deck heights above 15', optional on lower height models)
- Deep gray enamel finish
- Meets/exceeds ANSI requirements
- Platform controls: for operator safety both hands are required to change elevation
- Emergency stops:
 - Located on platform for operator use
 - Emergency stop also located on base for use by ground personnel
 - Lockable to prevent unauthorized use



STANDARD FEATURES:

- 120 volt AC power (raise and lower) with thermal overload protection

OPTIONAL POWER:

- 12 volt DC deep cycle system available with battery and charger
- Air-Hydraulic Drive - recommended for hazardous environments
- CAUTION:
 - Unless special provisions are made, platforms and lifts must not be used for energized bare-wire electrical work or operated on inclined surfaces
 - When this equipment is used, ground personnel should be excluded from the immediate work area

OPTIONS/ACCESSORIES:

- Cantilevered platform extensions
- Special voltage electrical systems
- 120 volt outlet on platform
- Safety orange powder coat finish

Custom Designs:

Available to meet your special access problems - contact factory for quotation

WORKING HEIGHT	PLATFORM HEIGHT		STABILIZERS	SPECIFY MODEL #	WEIGHT (lbs.)
	MAX	MIN.			
13'	7'4"	2'4"	NOT REQ'D	HW1-7	1700
16'	10'1"	5'		HW1-10	1800
19'	12'10"	3'		HW2-13	2000
21'	15'8"	5'8"	STD. EQUIP.	HW2-16*	2100
24'	18'8"	3'7"		HW3-19*	2300
27'	21'4"	6'4"		HW3-22**	2400
30'	24'4"	4'1"		HW4-24**	2700
33'	27'	6'8"		HW4-27**	2800

NOTE: All base dimensions are 9 by 4 ft. *Add 20" to 4-ft base width for extended stabilizers ** Add 40" to 4-ft base width for extended stabilizers

BALLYLIFTS

Features:

- Manually propelled one worker lift with 300 lbs. rated capacity
- Totally enclosed platform with 42" guardrails, midrails, and gate; 4" toeboards and skid resistant mat
- Two platform styles available:
 - Standard platform with steel deck (BL-315)
 - Cantilevered platform with aluminum deck (BL-C14)
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position while anti-skid rungs provide access to platform when platform is raised
- Compact base frame rolls on two swivel and two rigid 6" casters
- Rails fold down for doorway passage and easy storage
- Base is 32" wide by 65" long, outriggers extend to 68" wide
- Leveling jacks secure lift to the floor
- Hydraulic hand pump provides easy lifting
- Standard finish is deep gray enamel paint
- Meets/exceeds ANSI safety standards




Model BL-315

Manually Propelled

	Model Number	Platform Max	Platform Min	Platform Length	Platform Width	Weight Lbs.	Working Height
Standard	BL-315	15'	6' 4"	20"	28"	590	21'
Cantilevered	BL-C14	14'	6' 4"	64"	20"	900	20'

OPTIONAL ACCESSORIES	
AC electric power	Tool Tray
DC electric power	Fluorescent tube holder
Air-Hydraulic power	Platform duplex receptacle

Cantilevered Model BL-C14



Cantilevered platform extends 34" beyond base frame




Rolls thru standard doorway

MR TELESCOPING HYDRAULIC MAINTENANCE LIFTS

Features:

- Rated capacity 500 lbs./two person manually propelled
- Select from maximum platform heights of 15', 19', 24' or 28'
- Roomy 28" x 36" platform accommodates two workers
- Totally enclosed platform with 42" guard rails, midrails and gate; 4" toeboards and non-slip deck
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position
- Rails fold for doorway passage and easy storage
- Non-marking 8" casters for easy rolling and maneuverability
- Self-storing outriggers extend from base to provide maximum stability
- Leveling jacks secure unit to floor and compensate for uneven surfaces
- Standard deep gray enamel finish
- Meets/exceeds ANSI safety standards

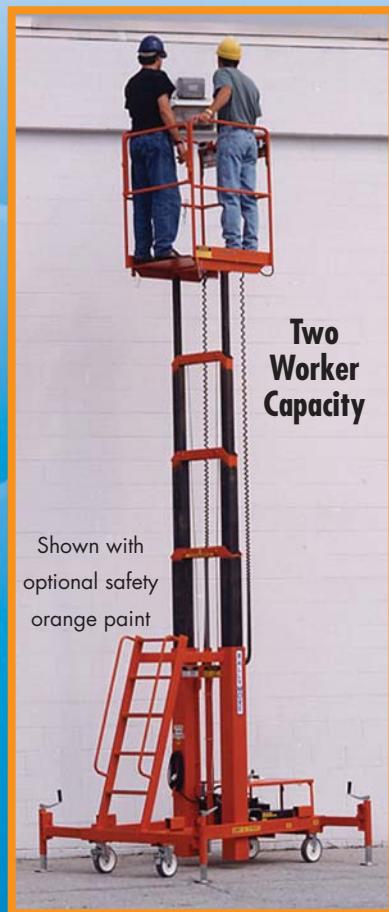

Two Worker Capacity

Shown with optional safety orange paint

Model Number	Platform Max	Height Min	Working Height	Weight Lbs.
MR-15-AC	15'	6' 4"	21'	800
MR-15-DC	15'	6' 4"	21'	930
MR-20-AC	19' 3"	6' 4"	25'	1000
MR-20-DC	19' 3"	6' 4"	25'	1130
MR-24-AC	23' 8"	6' 7"	30'	1200
MR-24-DC	23' 8"	6' 7"	30'	1330
MR-28-AC	28'	6' 10"	34'	1420
MR-28-DC	28'	6' 10"	34'	1550



Rolls thru standard doorway

500 lbs. Capacity

- Three available power options
- Convenient plug in 120V AC
- Independent 12V DC deep cycle system complete with battery and charger
- Air hydraulic power requiring 140 CFM with 90 PSI pressure

OPTIONAL ACCESSORIES

- Air-Hydraulic power
- Tool Tray
- Safety Orange Powder Coat Finish
- Fluorescent tube holder
- Platform duplex receptacle

POWER STOCKER LIFT

Features:

- Ground Entry - Manually Propelled - Hydraulic Order Picker
- Merchandise can be raised to shelf level and easily slid on or off shelf to minimize lifting
- No outriggers required, floor locks secure in place. Optional electric interlocks available
- 450 pound total capacity (operator and inventory)
- 12 volt DC power (AGM battery) with mounted charger included- Recharge using a standard 110 volt outlet
- High quality controls requires both hands to operate for user safety
- 100+ raise and lower cycles between charges
- Key lock prevents unauthorized use
- Optional sensing system creates a 2' safety zone around lift alerting operator of activity below lift
- Meets/exceeds ANSI safety standards



Ideal for the shop or retail floor!

MODEL #	WORKING HEIGHT	MERCHANDISE DECK MAX HEIGHT	FOOTPRINT W" x L"	OVERALL HEIGHT (LOWERED)	POWER	WEIGHT LBS.
PS-10	14'	9'	36" x 54"	76"	12V DC	1022
PS-12	17'	12'2"	36" x 54"	95"	12V DC	1079
PS-15	21'	15'6"	36" x 54"	83"	12V DC	1434



Optional Safety Sensing System



MAINTENANCE LIFT

Features:

- Manually propelled one person lift with 300 lbs. capacity
- Totally enclosed 26" x 28" platform with 42" guardrails, midrails and gate
- Welded compact base 32" x 63" allows lift to pass through doorways
- **No outriggers required**
- Rolls effortlessly on two locking swivel and two rigid 6" casters
- Both hands are required to operate controls for user safety
- 12V DC power source complete with battery and charger for raising and lowering, alternate power sources available
- 80 to 100 raise and lower cycles between charges
- 2 models to choose from:



Model OP-10
* Overall height in fully lowered position is 78"

- **Ground Entry (OP-10*)** - raises to 9'6" and contains two 24" x 24" shelves on base ***Shelf that raises and lowers with the platform not available**
- **One Step Entry (OP-11)** - raises to 10'6" and contains two 18" x 24" shelves on base and a 20" x 28" shelf that raises and lowers with the platform
- Standard finish is deep gray enamel paint.
- Meets/exceeds ANSI safety standards

Model Number	Platform Max	Platform Min	Working Height	Platform Length	Platform Width	Weight Lbs.
OP-10	9' 6"	12"	15'	26"	28"	710
OP-11	10' 6"	23"	16'	26"	28"	730



Model OP-11 includes shelf that raises and lowers with platform

Electrical Note: (on all lift products)

Our standard electrical components are NEMA 1 or equivalent and are intended for indoor use in normal atmospheric conditions. Ships at freight class 125.



INDUSTRIAL CROSSOVERS

Stair Sections (Set of 2) for Industrial Crossovers 2 to 7 Steps... with choice of widths

NO. OF STEPS EACH SECTION	VERTICAL CLEARANCE INCHES	27" OVERALL WIDTH (EXPANDED METAL)		31 1/2" OVERALL WIDTH (SERRATED GRATING)		38 1/2" OVERALL WIDTH (SERRATED GRATING)	
		MODEL#	WEIGHT	MODEL#	WEIGHT	MODEL#	WEIGHT
2 STEPS	28	CS227	253	CS231	254	CS238	276
3 STEPS	38	CS327	310	CS331	325	CS338	351
4 STEPS	48	CS427	378	CS431	393	CS438	428
5 STEPS	58	CS527	445	CS531	465	CS538	505
6 STEPS	68	CS627	517	CS631	537	CS638	583
7 STEPS	78	CS727	600	CS731	630	CS738	680



*Complete model designation includes suffix from "Bridge Sections" table. (i.e., CS327-CB227).

Bridge Sections for Industrial Crossovers

Combine any length with appropriate width stair sections

LENGTH IN INCHES	HORIZONTAL CLEARANCE INCHES	27" OVERALL WIDTH (EXPANDED METAL)		31 1/2" OVERALL WIDTH (SERRATED GRATING)		38 1/2" OVERALL WIDTH (SERRATED GRATING)	
		MODEL#	WEIGHT	MODEL#	WEIGHT	MODEL#	WEIGHT
20	18	-CB227	88	-CB231	95	-CB238	102
30	28	-CB327	111	-CB331	120	-CB338	128
40	38	-CB427	133	-CB431	140	-CB438	153
50	48	-CB527	156	-CB531	165	-CB538	180
60	58	-CB627	195	-CB631	203	-CB638	220

*Complete model designation includes prefix, indication a pair of stair sections from "Stair Sections" table.

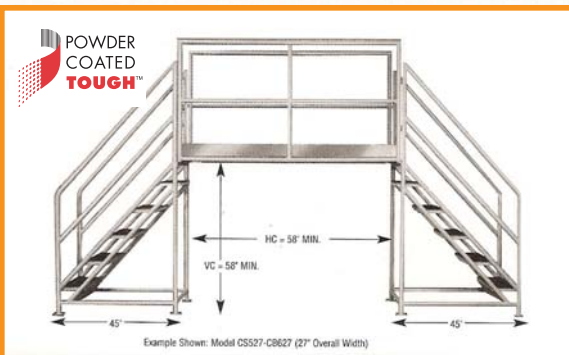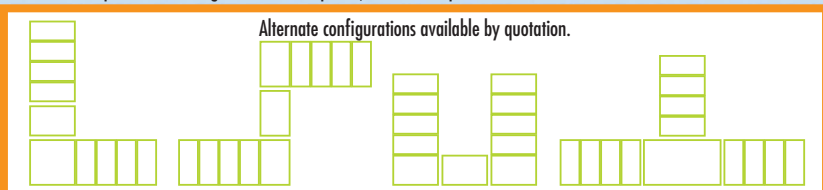

Features:

- Supplied in three pieces: two stair sections and one bridge
- Structural frame and rails are heavy 1 1/4" schedule 40 pipe
- Standard step and bridge tread: expanded metal or serrated grating (Optional solid steel tread with abrasive mat on bridge is available to avoid debris falling onto conveyors)
- Full rails, midrails and toeboards
- Stairway slope allows forward facing descent
- Stair sections have 10" step spacing with 9" of horizontal run per step
- Each stair section has four legs with large, pre-drilled plates to bolt to the floor
- Also available in alternate configurations: U-Shape, Z-Shape, L-Shape, etc.
- Gray powder coat finish
- Rated capacity 800 lbs.
- Maximum use of limited floor space while complying to OSHA requirements

MINI SCISSOR LIFT

Features:


- 500 lb capacity
- Provides working heights from 16' to 19'
- Maximum raised platform height of 9' 10" to 12' 9"
- MSL - 12 includes outriggers
- Platforms are both 24" x 46"
- 12 volt DC powered for raising and lowering
- Easy to roll on 6" casters
- Meets/exceeds ANSI safety standards




SHIPS KD FOR REDUCED SHIPPING COSTS

MODEL #	WORKING HEIGHT	PLATFORM MAX.	PLATFORM MIN.	FOOTPRINT W" x L"	OVERALL HEIGHT (Lowered)	WEIGHT (Lbs.)
MSL-10	16'	9' 10"	26"	28" x 46"	70"	787
MSL-12	19'	12' 9"	26"	28" x 46"	74"	917

CUSTOM VERTICAL ACCESS AIRCRAFT MAINTENANCE PLATFORMS

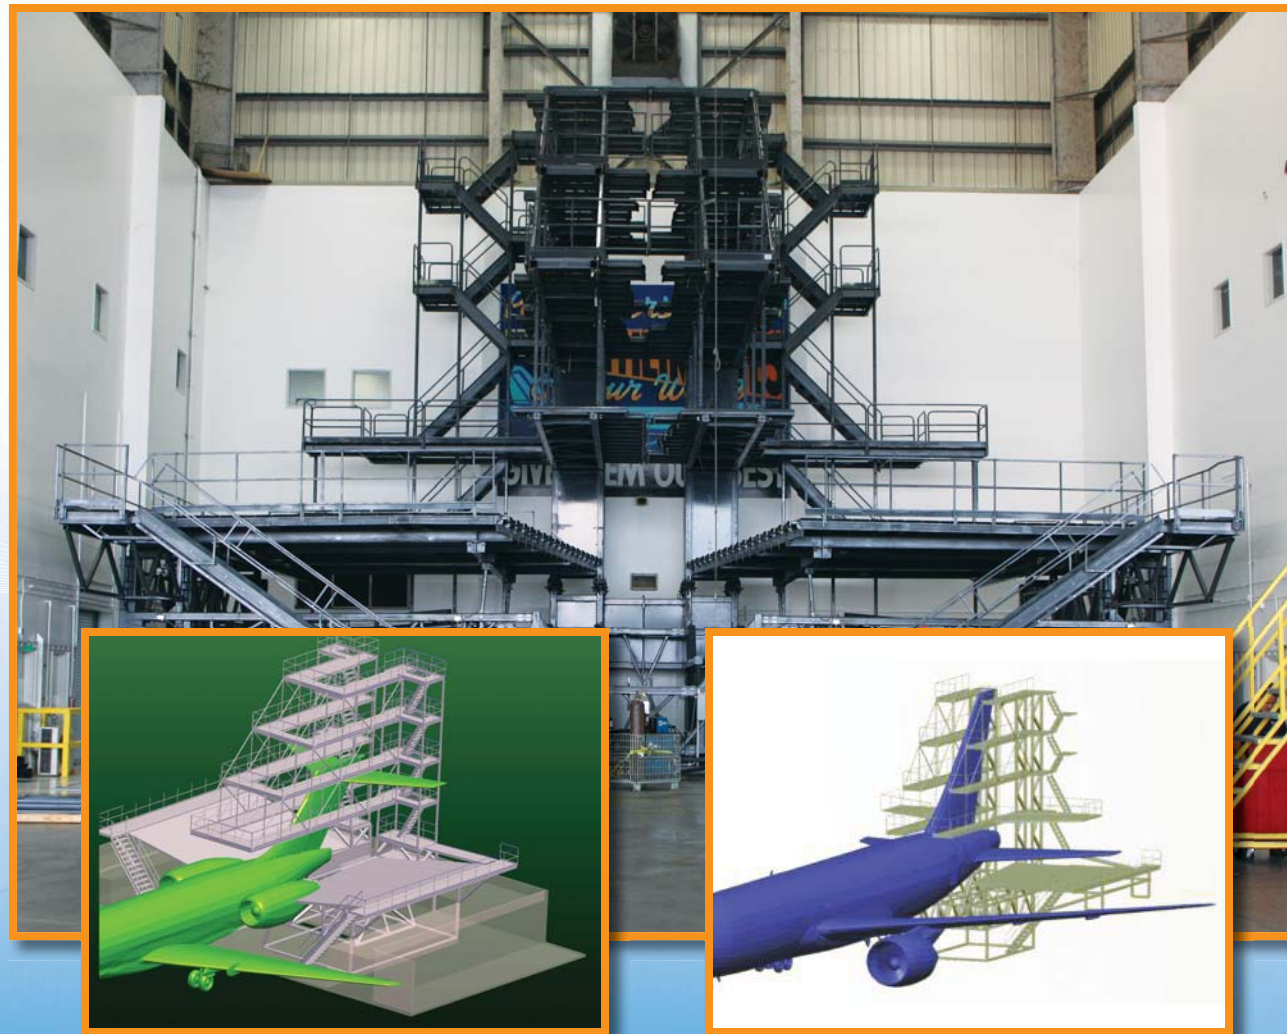

INDUSTRIAL WORK PLATFORMS

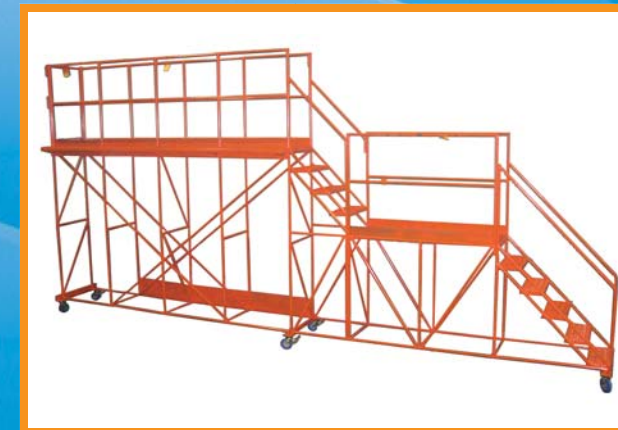

CALL BALLYMORE FOR ALL YOUR CUSTOM VERTICAL ACCESS REQUIREMENTS NO JOB TOO BIG OR TOO SMALL

BALLYMORE

